
Rear Door Latch: Service and Repair **Typical Push Button Rod** REMOVAL

1. Remove the door trim panel and watershield.

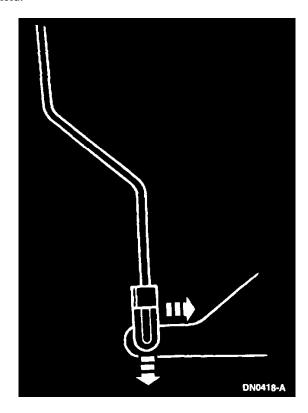

2. Disengage the retaining clip from the rod, and pull the rod away from the lever.

INSTALLATION

1. Follow the removal procedure in reverse order.